



EB-12 Earthing and Neutral Busbar – EB12 (568610)

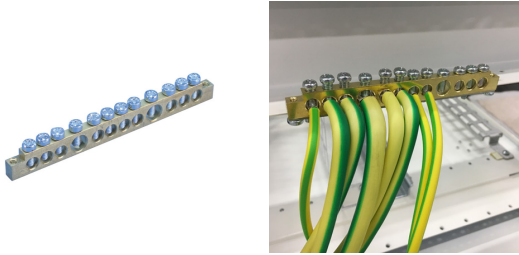

nVent ERIFLEX Connecting, Earthing and Neutral Busbars are used to connect several earthing conductors within a panel and can be used in a variety of different applications including switchgear and control equipment, electrical equipment, for wind and solar power generation and in data centers.

- Use to connect several earthing conductors
- Chamfered holes allow for easy connections
- Rigid bar
- RoHS compliant



Part Number	EB12
Article Number	568610
Material	Brass
Number of Connections	12
Conductor Size, IEC	(2) 16 - 35 mm ² Stranded (10) 4 - 16 mm ² Stranded
Ferrule Conductor Size, IEC	(2) 10 - 35 mm ² (10) 2.5 - 16 mm ²
Conductor Size, UL	(2) #6 Solid (10) #8 - #6 Solid (2) #6 Stranded (10) #8 - #6 Stranded
Max Current Rating	250 A
Depth (D)	6 mm
Height (H)	13 mm
Width (W)	120 mm
A	105 mm
B	9 mm
Unit Weight	0,068 kg
Complies With	IEC® 61439.1
Certifications	CE, ERIFLEX EB cULus EAC 0234268 (Russian Federation) RoHS

Part Number	EB12
Standard Packaging Quantity	10 pc
UPC	78285669532
EAN-13	3479775686103

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2020 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.