

SHP-T Basic Plus
Shp-T 400w Basic Plus E40
0020849



Product features

-



PRODUCT OVERVIEW

Product name	Shp-T 400w Basic Plus E40
Technology	HID
Watt (Rated) (W)	415
Lamp shape	Tubular shape
Type	SHP-T
Cap/Base	E40
Lamp finish	Clear
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821
E-number FI	4844466
Luminous flux (lm)	57500
Colour temperature (K)	2000
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Wattage (W)	415
Product Voltage (V)	100
Dimmable	No
Dimming method	Mains: leading / trailing edge
Average life (Nominal) (h)	32000
Product EAN number	5410288208497

DATA TABLE

General data	
Product name	Shp-T 400w Basic Plus E40
Technology	HID
Watt (Rated) (W)	415
Lamp shape	Tubular shape
Type	SHP-T
Cap/Base	E40
Lamp finish	Clear
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821

SHP-T Basic Plus

Shp-T 400w Basic Plus E40

0020849

E-number FI	4844466
-------------	---------

Optical data

Luminous flux (lm)	57500
Luminous flux (Rated) (lm)	57500
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	2000
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 4000 h 50Hz	96
Rated lumen maint. factor (%) at 6000 h 50Hz	95
Rated lumen maint. factor (%) at 8000 h 50Hz	93
Rated lumen maint. factor (%) at 12000 h 50Hz	90
Rated lumen maint. factor (%) at 16000 h 50Hz	88
Rated lumen maint. factor (%) at 20000 h 50Hz	86

Electrical data

Wattage (W)	415
Current (A)	4.6
Product Voltage (V)	100
Control gear required	Yes
Transformer required	No
Dimmable	No
Dimming method	Mains: leading / trailing edge
Lamp Energy Label (class)	E
kWh per 1000 hours burning time	440

Lifetime data

Average life (Nominal) (h)	32000
Average life (Rated) (h)	32000
Life T90	16000
Rated survival factor (%) at 2000 h 50Hz	100
Rated survival factor (%) at 4000 h 50Hz	99
Rated survival factor (%) at 6000 h 50Hz	98
Rated survival factor (%) at 8000 h 50Hz	97
Rated survival factor (%) at 12000 h 50Hz	93
Rated survival factor (%) at 16000 h 50Hz	90
Rated survival factor (%) at 20000 h 50Hz	86

SHP-T Basic Plus

Shp-T 400w Basic Plus E40

0020849

Physical data

Nominal Product Length (mm)	280
Nominal Product Diameter (mm)	46
Max. Lamp Diameter (mm) - D	47
Weight (kg)	0.155


Packaging

Single packaging type	Carton
Product EAN number	5410288208497
Packaging single length / height (cm)	32.56
Packaging single width (cm)	5.02
Packaging single depth (cm)	5.02
DUN14 (outer)	15410288208494
Units per outer package	12
Packaging outer length / height (cm)	34.1
Packaging outer width (cm)	16.3
Packaging outer depth (cm)	21.6


Safety data

Lamp mercury content (mg)	16.00
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY

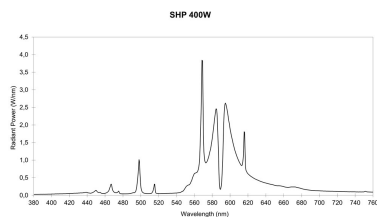

TECHNICAL DRAWINGS



SHP-T Basic Plus
Shp-T 400w Basic Plus E40
0020849


SYLVANIA
0020849




415
kWh/1000h



2019/2015

SHP-T Basic Plus
Shp-T 400w Basic Plus E40
0020849

 **ENERG** 
SYLVANIA
0020849

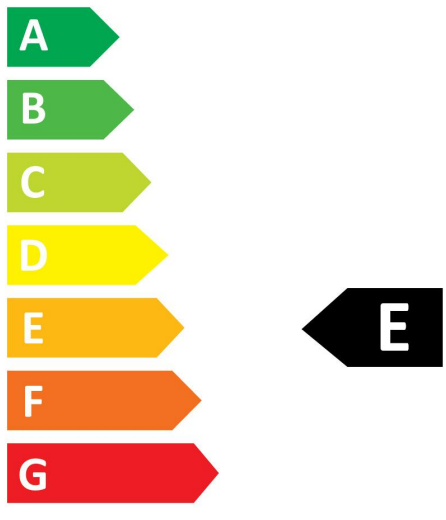

415
kWh/1000h



2019/2015