



Features



- Blacklight BL368 Linear T12

Product Overview

Product name	F40W T12 BL368 24
Technology	Special applications
Lamp shape	Tubular shape
Type	T12
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	SPG
ETIM Class	EC002962
E-number FI	4940437
Light colour	BL368 Blacklight
Wattage (W)	40.00
Dimmable	No
Average life (Nominal) (h)	10000
Product EAN number	5410288016382
Dimming method	N/A

F40W T12 BL368 24
0001638

Technical drawings

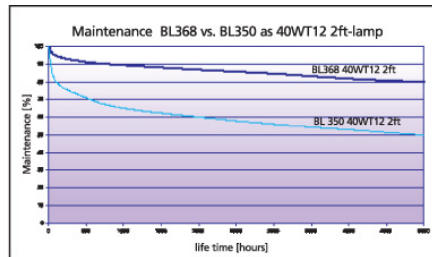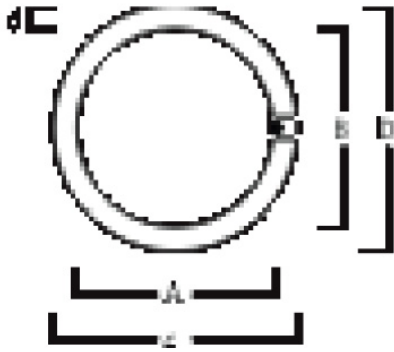

Data table

GENERAL DATA

Product name	F40W T12 BL368 24
Technology	Special applications
Lamp shape	Tubular shape
Type	T12
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	SPG
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC002962
E-number FI	4940437

OPTICAL DATA

Ambient temperature for maximum luminous flux (°C)	25
Light colour	BL368 Blacklight
Adjustable chromaticity	N

ELECTRICAL DATA

Wattage (W)	40.00
Mains voltage (V)	230-240V
Control gear required	Yes
Transformer required	No
Dimmable	No
Dimming method	N/A

LIFETIME DATA

Average life (Nominal) (h)	10000
----------------------------	-------

PHYSICAL DATA

Nominal Product Length (mm)	600.0
Nominal Product Diameter (mm)	38
Max. Length base to base (mm) - A	589.8
Length base to pin Min-Max (mm) - B	594.5-596.9
Max. Lamp Length (mm) - C/L	604.0
Max. Lamp Diameter (mm) - D	40.5
Weight (kg)	0.142

PACKAGING

Single packaging type	Carton
Product EAN number	5410288016382
Packaging single length / height (cm)	60.3
Packaging single width (cm)	4.3
Packaging single depth (cm)	4.1

F40W T12 BL368 24
0001638

DUN14 (outer)	15410288016389
Units per outer package	25
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	21.0

SAFETY DATA

Lamp mercury content (mg)	9.00
Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	Yes
Intended purpose	Flykilling - Insect attraction
Dry applications use only	No
Suitable for household illumination	No
Safety message	Not suitable for household