

Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9.5W; 1150lm; 121lm/W; 3000K; UGR <19 with shallow product depth 50mm. Meets TP(a) requirements.

Product Overview


Product name	Insaver Slim UGR19 IP44 150 1150lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4278509
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	121
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	9.5
Electrical protection	Class II
Control gear type	LED driver constant current

Insaver Slim UGR19 IP44 150 1150lm 830

0030500

Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288305004
Warranty	5 years
Dimming method	N/A

Photometry

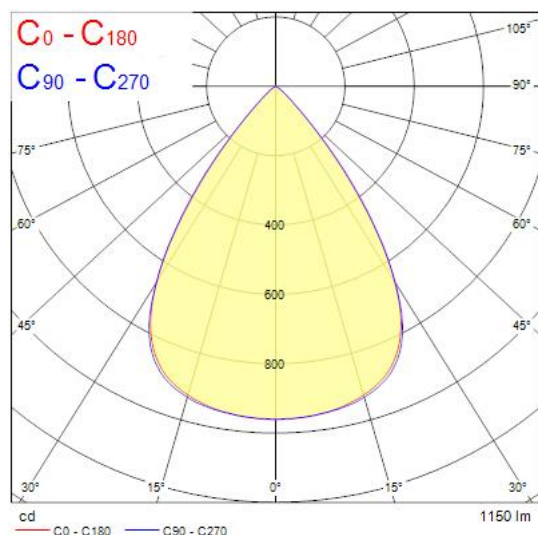

Technical drawings

