


START Panel IP40 UGR19 1200x300

START Panel UGR19 1200x300 3800Lm 840 SSC
0042900



Product features

- LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle, optical system: PS diffuser with Prismatic finish. Light color temperature: 4000K Neutral White, total system power: 36W, total fixture output: 3800lm, efficacy: 106 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, SylSmart StandAlone (SSC) wireless dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, Loop in / loop out wiring, safety cables included, 25mm nominal height, White color frame, weight: 1,9Kg.

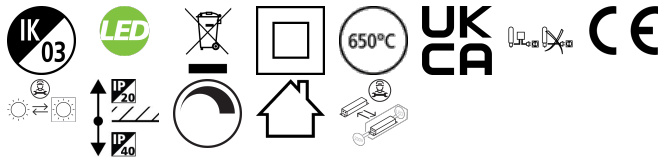

PRODUCT OVERVIEW


Product name	START Panel UGR19 1200x300 3800Lm 840 SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278480
Warranty	5 years
Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	106
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288429007

START Panel IP40 UGR19 1200x300

START Panel UGR19 1200x300 3800Lm 840 SSC
0042900

PHOTOMETRY

0.5	0.91 0.83	E(0°) 1879 E(C90) 42.3° 1838 E(C0) 38.4° 1742
1.0	1.82 1.65	E(0°) 1896 E(C90) 42.3° 184 E(C0) 38.4° 88
1.5	2.73 2.48	E(0°) 842 E(C90) 42.3° 171 E(C0) 38.4° 194
2.0	3.64 3.31	E(0°) 476 E(C90) 42.3° 86 E(C0) 38.4° 108
2.5	4.55 4.14	E(0°) 303 E(C90) 42.3° 81 E(C0) 38.4° 72
3.0	5.46 4.96	E(0°) 211 E(C90) 42.3° 43 E(C0) 38.4° 48
Distance [m] Core diameter [m]		Illuminance [lx]
— C0 - C180 (Half beam angle: 79.2°)		
— C90 - C270 (Half beam angle: 84.6°)		



TECHNICAL DRAWINGS

