


## START Panel IP40 UGR19 1200x300

START Panel UGR19 1200x300 3600Lm 830 LILO  
0042836



### Product features

- LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle, optical system: PS diffuser with Prismatic finish. Light color temperature: 3000K Warm White, total system power: 36W, total fixture output: 3600lm, efficacy: 100 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, Loop in / loop out wiring, safety cables included, 25mm nominal height, White color frame, weight: 1,9Kg.

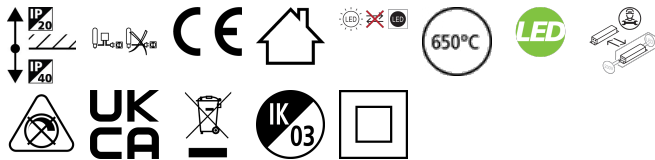

### PRODUCT OVERVIEW

Product name	START Panel UGR19 1200x300 3600Lm 830 LILO
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278462
Warranty	5 years
Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288428369

## START Panel IP40 UGR19 1200x300

*START Panel UGR19 1200x300 3600Lm 830 LILO*  
0042836

### DATA TABLE

#### General data

Product name	START Panel UGR19 1200x300 3600Lm 830 LILO
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278462
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

#### Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20.0
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>25000
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	680
Inrush Current (A)	17
Inrush Duration (µs)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)

## START Panel IP40 UGR19 1200x300

*START Panel UGR19 1200x300 3600Lm 830 LILO*  
0042836

Max. Luminaires per 10A C Breaker	51
Max. Luminaires per 13A C Breaker	66
Max. Luminaires per 16A C Breaker	81
Max. Luminaires per 20A C Breaker	102
Max. Luminaires per 10A B Breaker	33
Max. Luminaires per 13A B Breaker	43
Max. Luminaires per 16A B Breaker	54
Max. Luminaires per 20A B Breaker	68

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Nominal Product Length (mm)	1195
Nominal Product Width (mm)	295
Nominal Product Height (mm)	26
Weight (kg)	1.9

### Packaging


Single packaging type	Carton
Product EAN number	5410288428369
Packaging single length / height (cm)	30.0
Packaging single width (cm)	124.5
Packaging single depth (cm)	3.8
DUN14 (outer)	15410288428366
Units per outer package	4
Packaging outer length / height (cm)	125.0
Packaging outer width (cm)	38.0
Packaging outer depth (cm)	17.0

### Safety data

Optimal operating condition (°C)	-10-45
----------------------------------	--------

## PHOTOMETRY

## START Panel IP40 UGR19 1200x300 *START Panel UGR19 1200x300 3600Lm 830 LILO* 0042836

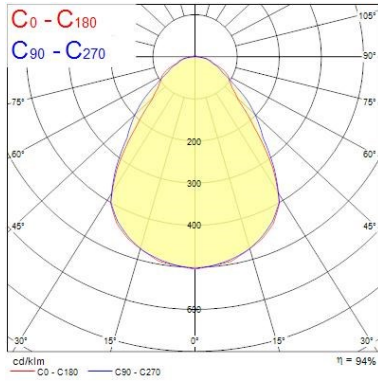

Distance [m]	Cone diameter [m]	Beam diameter [m]	E(0°) [lx]	E(C90) [lx]	E(C0) [lx]
0.5	0.84 0.79	0.84	768	40.0° 189	38.3° 1812
1.0	1.68 1.58	1.68	1864	40.0° 47	38.3° 49
1.5	2.52 2.37	2.52	833	40.0° 188	38.3° 201
2.0	3.36 3.16	3.36	486	40.0° 154	38.3° 113
2.5	4.20 3.95	4.20	298	40.0° 97	38.3° 72
3.0	5.03 4.74	5.03	207	40.0° 68	38.3° 50

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 C0 - C180 (Half beam angle: 76.6°)  
 C90 - C270 (Half beam angle: 90.0°)

### TECHNICAL DRAWINGS

