


Concord

ASCENT 100 II ARCH 940 3K IP65 DALI 160
2060698

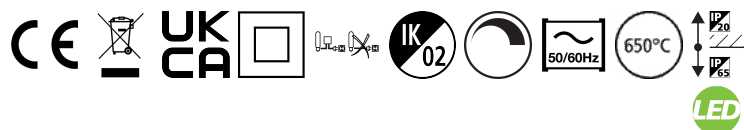

Features

- The ASCENT 100 II ARCH 940 3K IP65 DALI 160 is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra >80, Colour temperature: 3000K Warm White, Class II, Protection rating IP65/IK02, Cut out dimensions: 178mm

Product Overview


| | |
|---------------------------------|---|
| Product name | ASCENT 100 II ARCH 940 3K IP65 DALI 160 |
| Technology | LED |
| Cap/Base | Cable |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| General application | Hospitality, Office, Retail |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 940 |
| Luminous flux (lm) | 940 |
| Luminaire efficacy (lm/W) | 134 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 85 |
| Glare control | < 22 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 7 |

Concord

ASCENT 100 II ARCH 940 3K IP65 DALI 160 2060698

| | |
|---------------------------|----------------------------------|
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Control gear mounting | Remote |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP65/20 |
| IK rating | IK02 |
| Product EAN number | 5025768606986 |
| Warranty | 5 years |
| Dimming method | DALI, Switch-dim (mains-rated) |

Photometry

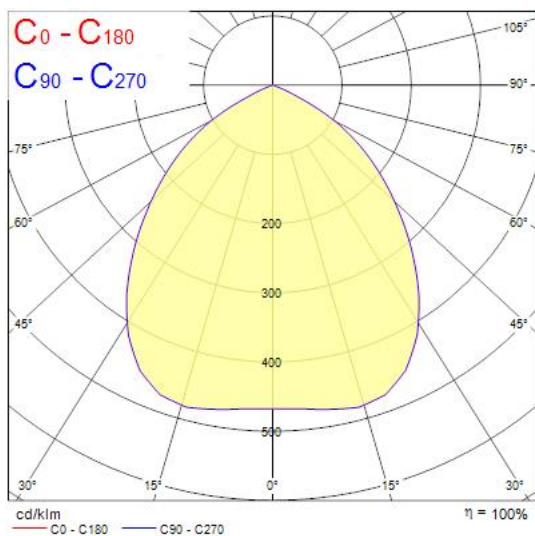

Technical drawings

