

## Midi Horns and Sirens / Electronic Siren 123

**Electr. Siren WM alternating 24VDC BK**

**Part No.:** 123.200.55

**MECHANICAL DATA**

Length	67 mm
Width	54 mm
Height	67 mm
Diameter	54 mm
Materials	ABS
Housing colour	Black
Protection category	IP54
Connection	Cable
cross-sectional area maximum	0,50mm <sup>2</sup> / 20AWG
Type of fixing	Wall mounting
Working temperature minimum	-30°C
Working temperature maximum	+70°C
Weight with packaging	97 g
Product weight	81 g

**ELECTRICAL DATA**

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	100 mA
Rated inrush current	3.000 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

**ACUSTICAL DATA**

Volume (max) at 1m distance	105,0 dB (A)
Acoustic signal image	Alternating tone
Acoustic service life	1,000 h minimum

**APPROVAL DATA**

Conforms with CE	yes
WEEE	yes
Conform with ATEX-directive	no
Conforms with CCC	no
Conforms with UL	nein
Conforms with FCC	no
Conforms with IC	No

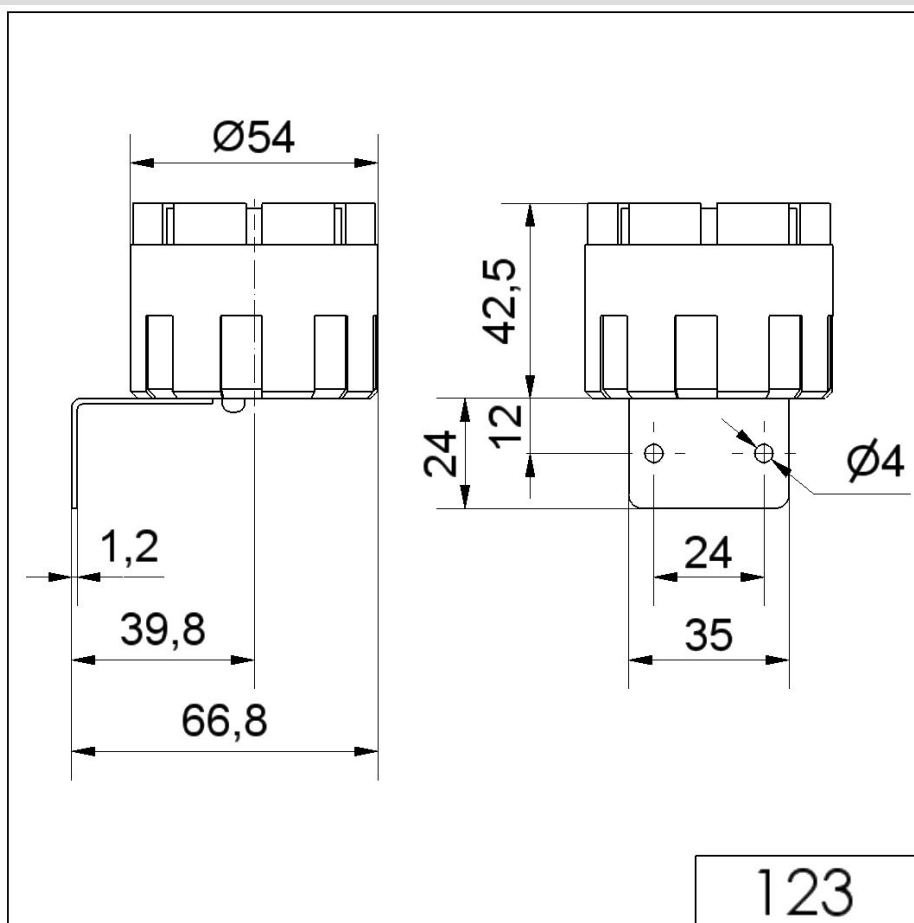


For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

## Midi Horns and Sirens / Electronic Siren 123

**Electr. Siren WM alternating 24VDC BK**

EAC Zertifikat vorhanden	yes
Conforms with AS-I	no
ICAO Certification	No
Conforms with GL	no
Conforms with RoHS CN	no
Conforms with VdS	no

**DRAWING**


For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.