

Data Sheet | Item Number: 267-303

Conductor support; with direct ground contact; with snap-in mounting feet; 3-pole; white

https://www.wago.com/267-303

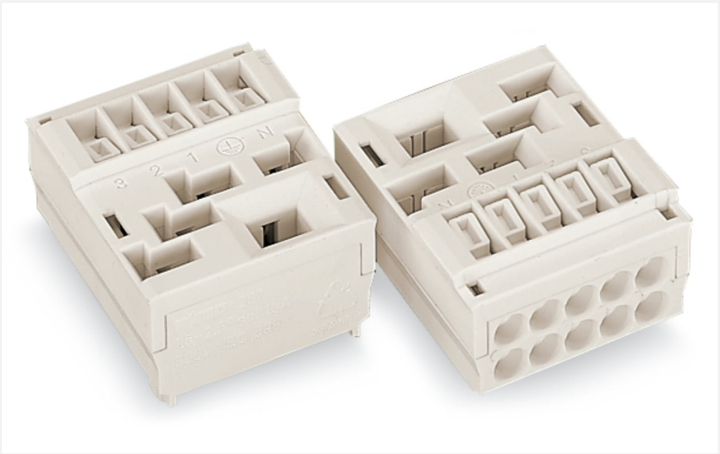

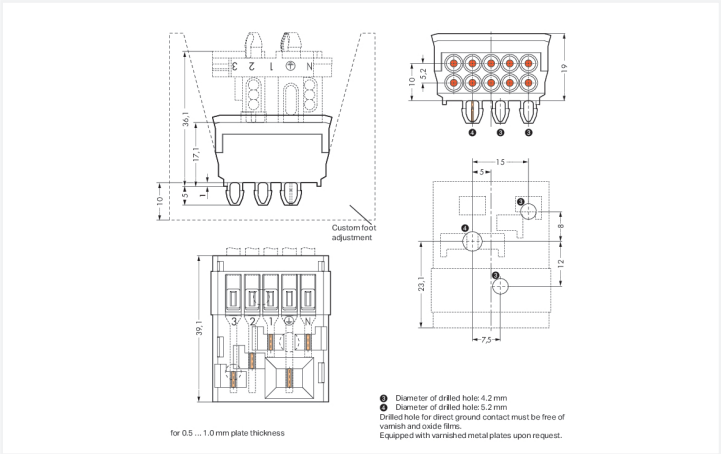

Color: white

Similar to illustration

Dimensions in mm
3) Drilled hole diameter: 4.2 mm4) Drilled hole diameter: 5.2 mmDrilled hole for direct PE contact must be free of varnish and oxide films.Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Conductor support (item number 267-303) simplifies electrical installations. Conductors should only be connected to conductor support if their strip length is between 11 and 12 mm . Depending on the conductor type, conductor support is suitable for conductor cross sections ranging from 0.5 mm² to 1 mm².

The contact surface is tin-coated

- Ready to install, immediately usable
- Compact sizes

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	16 A	-

Ratings per IEC/EN 2	
Rated current	6 A

Connection Data

Number of connection types	1

Connection 1	
Solid conductor	0.5 … 1 mm²
Strip length	11 … 12 mm / 0.43 … 0.47 inches
Pole number	3

Physical data

Width	39.1 mm / 1.539 inches
Height from the surface	19 mm / 0.748 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E_{Cu})
Contact Plating	Tin
Fire load	0.291 MJ
Weight	15.8 g

Environmental requirements

Temperature stability	105 °C

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454415419
Customs tariff number	85366990990

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 1977	UL-US-L45171-12-52204002
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Continued on next page

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-303

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB

CAD/CAE-Data

CAD data

2D/3D Models 267-303

CAE data

ZUKEN Portal 267-303