

Data Sheet | Item Number: 289-179

Interface module; RJ-45; with power jumper contacts; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle; 1,50 mm²

https://www.wago.com/289-179

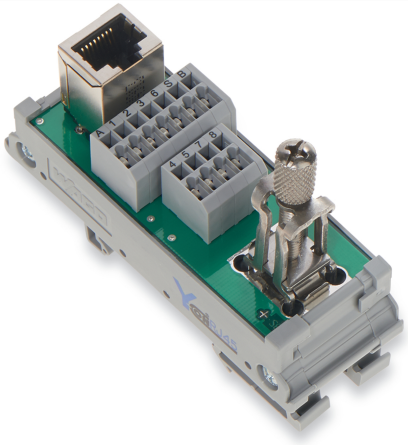



Electrical data

Operating voltage	≤ 35 VAC; ≤ 50 VDC
Nominal current	2.1 A
Insulation resistance	≥ 500 MΩ
Specialty functions	With power jumper contacts With shield connection With shield clamping saddle

Safety and protection

Dielectric strength (contact/contact) (AC, 1 min)	1 kVrms

Connection Data

Mating cycles	1000
Transmission length (max.)	100 m
Connection Cable	Cat. 5 (min.)
WAGO shield clamping saddle	11 mm wide; cable diameter up to 8 mm

Connection 1

Pluggable connector	Shielded RJ-45; with two additional power jumper contacts
Pole number 1	10
Connection type	System

Connection 2

Design	PCB terminal blocks (double-row)
Pole number	11
Connection type	System
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 739 Series
Solid conductor	0.08 … 1.5 mm² / 28 … 14 AWG
Fine-stranded conductor	0.08 … 1.5 mm² / 28 … 14 AWG
Strip length	5 … 6 mm / 0.2 … 0.24 inches

Physical data

Width	30 mm / 1.181 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	67 mm / 2.638 inches

Mechanical data

Mounting type	DIN-35 rail
Housing design	Mounting carrier
Mating cycles	1000

Material data

Fire load	0.503 MJ
Weight	52.5 g

Environmental requirements

Ambient temperature (operation)	-40 … +85 °C (Actuation: -35 … +85 °C)
Ambient temperature (storage)	-40 … +85 °C
Relative humidity	≤ 85 % (non-condensing)

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454326197
Customs tariff number	85366990990

Product Classification

UNSPSC	39121421
eCl@ss 10.0	19-17-90-01
eCl@ss 9.0	19-17-90-01
ETIM 9.0	EC001121
ETIM 10.0	EC002780
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Continued on next page

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-179

Documentation

Bid Text

289-179	19.02.2019	xml 3.82 KB
289-179	09.02.2015	doc 26.00 KB

Instruction Leaflet

Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB

CAD/CAE-Data

CAD data

2D/3D Models 289-179

CAE data

EPLAN Data Portal 289-179

WSCAD Universe 289-179

ZUKEN Portal 289-179

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 709-196
Marking strips; for laser printer; translucent

Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Tool

1.1.2.1 Operating tool



Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft