

CORDLESS JIGSAW

- Cordless jigsaw for precise cuts in different materials, such as timber, metal, aluminium, brass, plastic etc. (when using a suitable saw blade)
- Maintenance-free, particularly efficient brushless motor with longer run time and service life as well as low wear
- Cordless work with the Scheppach IXES 20 Volt series – all batteries and chargers belonging to this system series can be combined with the cordless jigsaw
- Quick sawing progress, thanks to pendulum stroke adjustable in 3 steps and fine-cut adjustment
- 5 cutting angles that can be adjusted without the need for tools (-45°, -22.5°, 0°, +22.5°, +45°)
- 6 speed level from 1000 – 3000 strokes per minute
- Foldable, removable, transparent saw blade guard allows safe work
- Guard prevents breakout
- Sliding shoe prevents the workpiece being scratched, allowing processing of delicate surfaces
- Blowing function ensures cutting line is free from shavings
- Quick-release chuck ensures easy saw blade replacement
- Ergonomic and compact design with soft-grip surface
- Practical LED work light with additional 10 seconds of light after switching off the device ensures perfect illumination even in poor lighting conditions
- Battery and charger available separately
- Includes saw blade for timber, parallel stop, connection to external dust extraction, 1 extraction adapter, 1 breakout guard including line guidance, protective cover



Product features
BRUSHLESS MOTOR

- Maintenance-free, brushless motor technology
- Service life up to 10 times longer
- Lower thermal motor load
- Maximum efficiency, thanks to ideal power transfer
- Longer battery life, thanks to lower power consumption

360°



High-quality and robust quick-release chuck

Pendulum stroke

Sliding shoe

Part of the battery platform



SPECIFICATIONS

| | |
|------------------------|---|
| Dimensions L x W x H | 285 x 200 x 75 mm |
| Motor type | Brushless motor |
| Stroke rate | 1000 – 3000 rpm |
| Stroke length | 25.4 mm |
| Pendulum stroke levels | 1 – 3 and fine cut setting |
| Cutting angle | 5 adjustable -45° / -22.5° / 0° / +22.5° / +45° |
| Cutting depth max. | 100 mm (timber), 10 mm (metal) 15 mm (aluminium) |
| Battery voltage | 20 V |

LOGISTICAL DATA

| | |
|----------------------|-------------------|
| Weight net / gross | 1.8 / 2.4 kg |
| Packaging dimensions | 310 x 240 x 80 mm |
| Article number | 5901818900 |
| Barcode | 4046664217794 |
| 20 Container | 2840 pcs |
| 40 Container | 6000 pcs |
| 40 HQ Container | 7000 pcs |



EXAMPLES OF USE
SUITABLE FOR

Workshop




Construction site



House



UNIVERSAL USE



ALUMINIUM



TIMBER



PLASTIC



CURVED CUTS



Quick-release chuck
ensures easy saw blade replacement

Parallel stop



6 speeds
adjustable via setting wheel



Pendulum stroke adjustable in 3 steps
and fine cut setting



PRODUCT DETAILS

Saw blade length
152 mm



Stroke length
25.4 mm



Stroke rate
1000 – 3000 rpm



5 cutting angles
-45° / -22.5° / 0°
/ +22.5° / +45°



Blowing function




20 V



Sliding shoe prevents the workpiece being scratched, allowing processing of delicate surfaces.



Practical LED work light ensures perfect illumination even in poor lighting conditions.

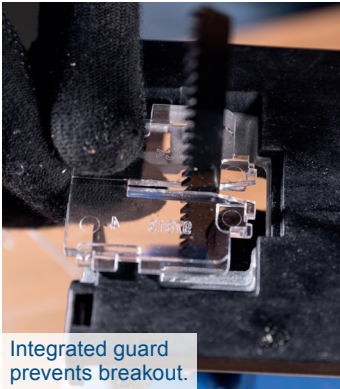

Integrated guard prevents breakout.