


CORDLESS PLUNGE SAW – SET


BC-PL60-X – SET L2

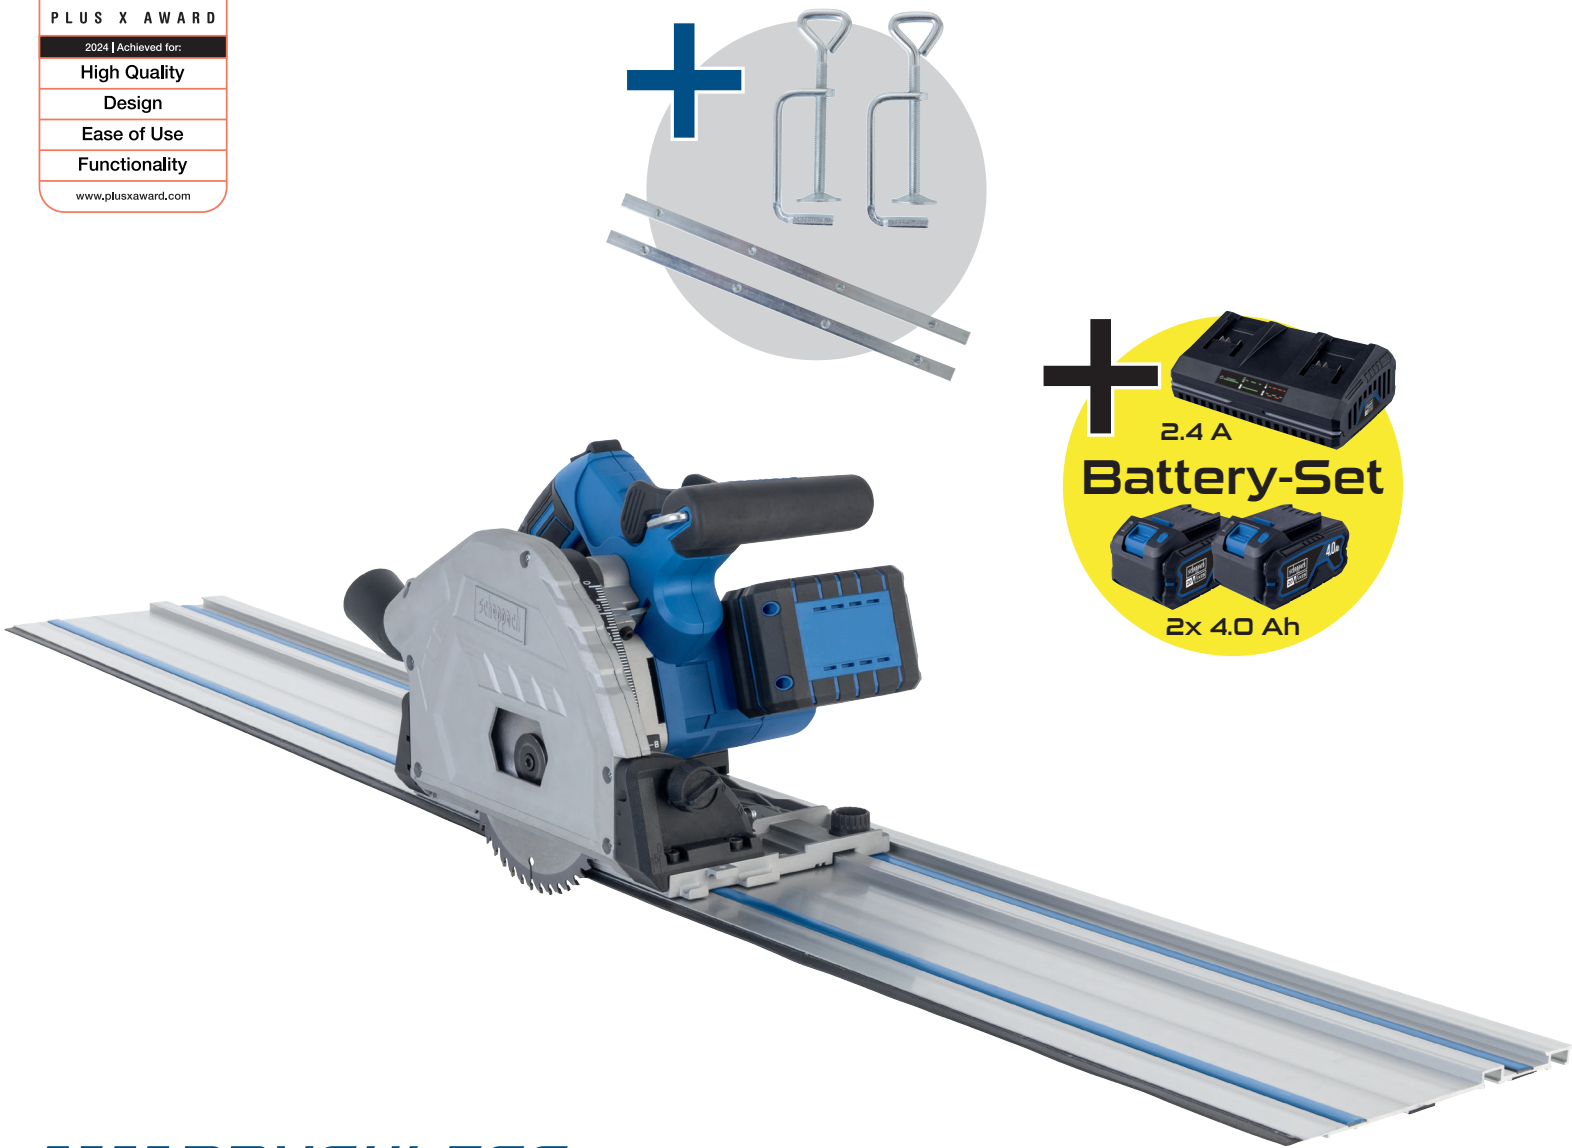

BRUSHLESS

PRODUCT DATA	
Dimensions L x W x H	335 x 220 x 245 mm
Engine type	Brushless motor
Battery voltage	20 V / 40 V
Saw blade specifications	165 x 20 x 1.1 x 1.6 mm, 48 T
Saw blade speed	3000 – 6300 rpm
Max. cutting depth 90°	61 mm
Max. cutting depth 45°	45 mm
Tilt angle	0° – 48°
Recess joint	Yes
LED	No
Cutting line display	No


LOGISTICAL DATA		
	Single device	SET L2
	Without battery / charger	2x 4.0 Ah battery 1x 2.4 A twincharger
Weight net / gross	7.6 / 9.0 kg	10 / 11.6 kg
Packaging dimensions	710 x 248 x 253 mm	710 x 248 x 253 mm
Item number	5901821900	5901821400
EAN	4046664235996	4046664267997
20 containers	1800 pcs.	1800 pcs.
40 containers	3660 pcs.	3660 pcs.
40 HQ containers	4500 pcs.	4500 pcs.

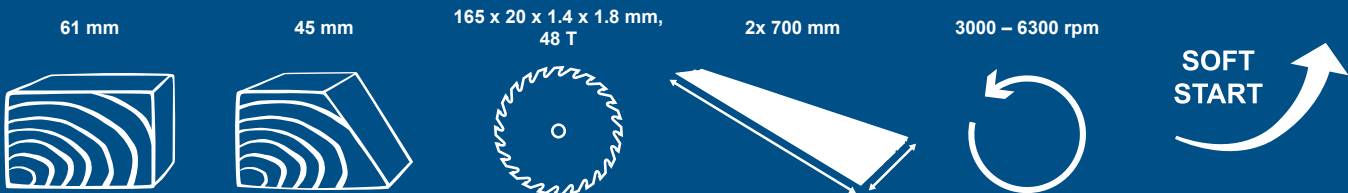

Adjustable cutting angle from 0° to 48°.



Powerful cordless plunge saw for precise cuts in sheet material, Solid wood, laminate, and for cutting shadow gaps or cut-outs in worktops.

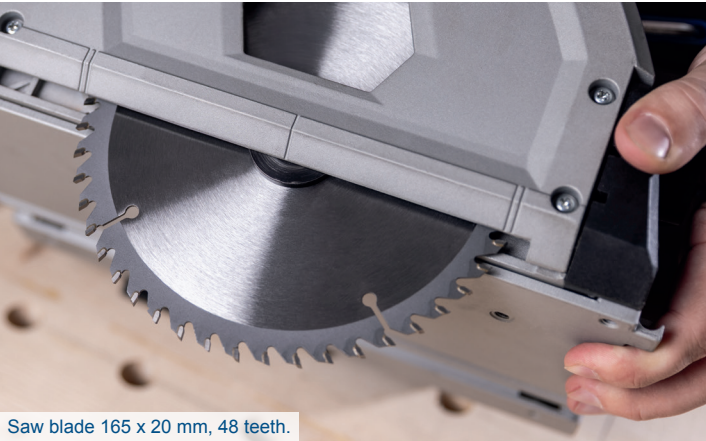

Saw blade 165 x 20 mm, 48 teeth.



Flexible use with 1x 20 V batteries or 2x 20 V (40 V) batteries.

Cutting performance: 15 mm chipboard	
2x 2.0 Ah	2x 4.0 Ah
33 m	66 m
Specification per battery charge Running time and performance may vary depending on external conditions.	



Guide rails (2 x 700 mm) enable precise cutting of the workpiece.



Low-dust working thanks to extraction nozzle.



Cutting depth at 90°: 61 mm; cutting depth at 45°: 45 mm.

- INCLUDING**
- 2x 700 mm guide rail
 - 2x rail connectors
 - 2x screw clamps
 - 1x anti-tip device
 - 2x 20 V / 4.0 Ah battery
 - 1x 2.4 A twincharger

