

3in1

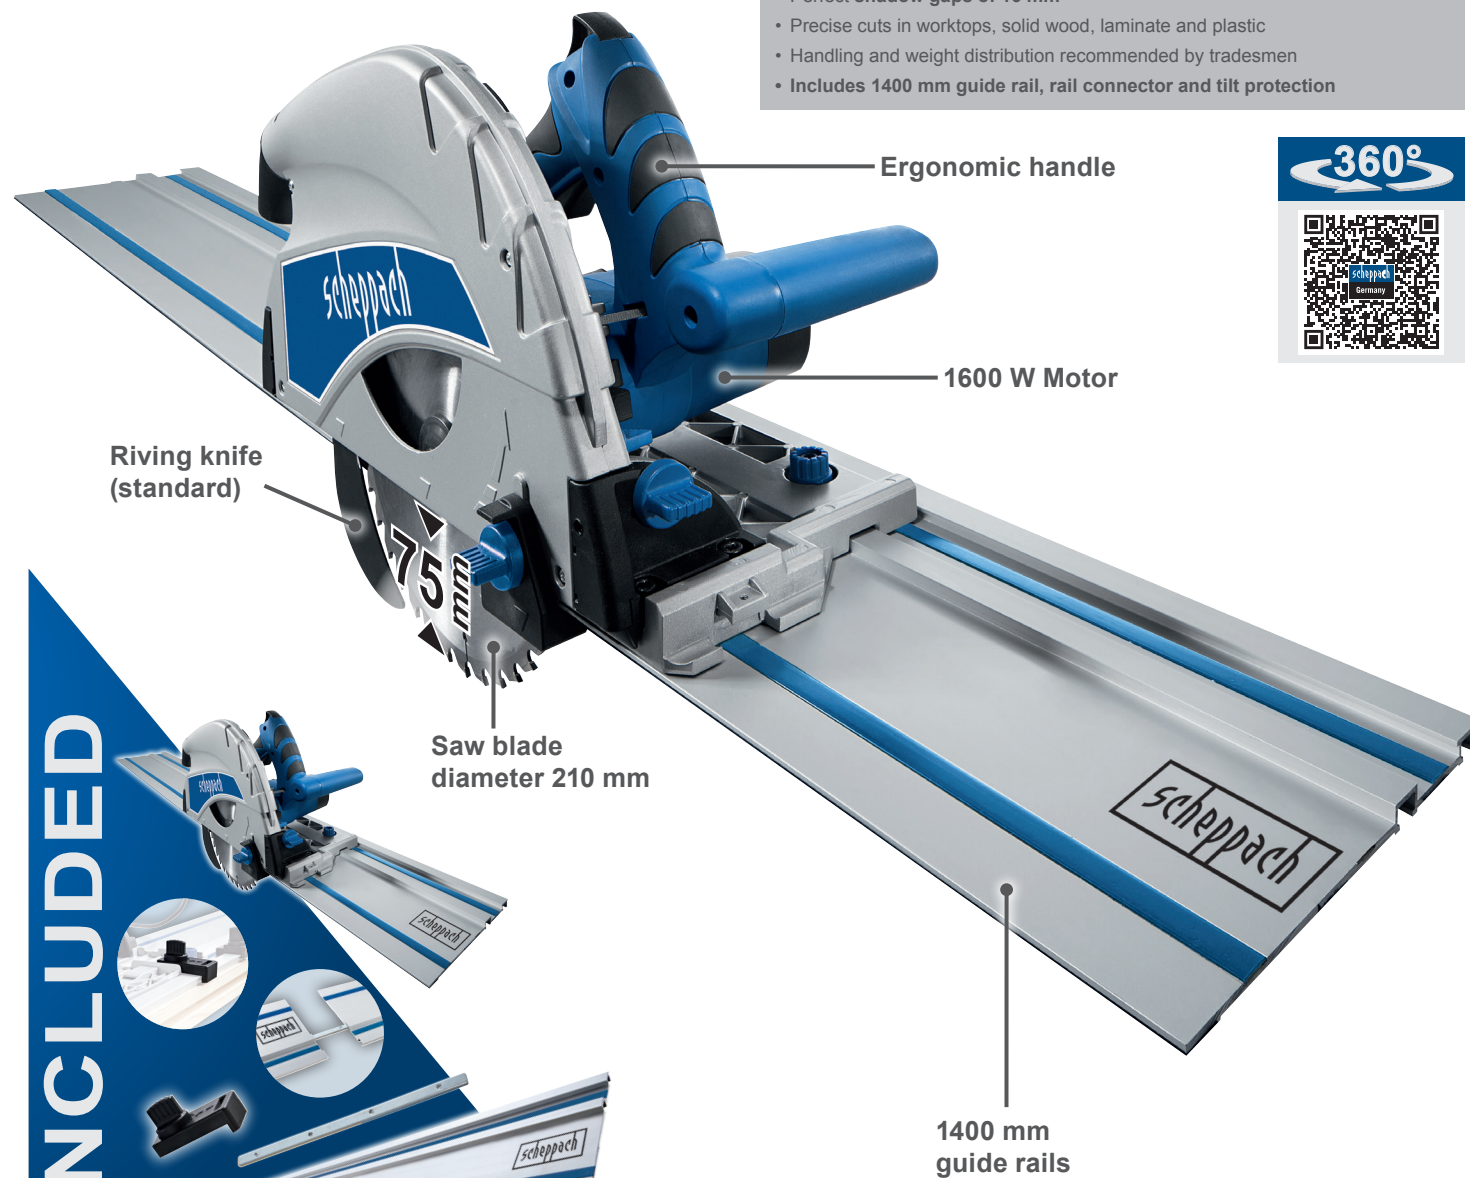
- ✓ Plunge saw
- ✓ Hand held circular saw
- ✓ Panel sizing saw



Scheppach Plunge saw PL75
Premium Class 1,5
Heimwerker Praxis
Germany 3/23
Value for money: very good

8" PROFESSIONAL PLUNGE SAW SET

- Powerful, thanks to **1600 W** motor
- Guide rail allows parallel penetration of the saw blade and uniform guidance of the saw
- Saw blade with 24 teeth guarantees a very clean cross section with minimal breakout for laminate
- Efficient extraction of sawdust, thanks to saw blade enclosed by guard
- **A cutting depth of 75 mm** makes cutting and adjustment of most door thicknesses easier
- Suitable for different materials such as solid wood, work tops, MDF panels coated on both sides, laminate etc.
- The best cutting results even without guide rail
- Perfect **shadow gaps of 16 mm**
- Precise cuts in worktops, solid wood, laminate and plastic
- Handling and weight distribution recommended by tradesmen
- Includes **1400 mm** guide rail, rail connector and tilt protection

**INCLUDED****LOGISTICAL DATA**

Weight net / gross	6.9 / 7.6 kg
Packaging dimensions	430 x 240 x 315 mm
Article number	5901804901-901
Barcode	4046664042396
20 Container	810 pcs (670 pcs with 1400 mm rail)
40 Container	1680 pcs (1350 pcs with 1400 mm rail)
40 HQ Container	1920 pcs (1540 pcs with 1400 mm rail)

SPECIFICATIONS

Dimensions L x W x H	420 x 300 x 235 mm
Blade Ø	210 mm
Arbor Ø	30 mm
Blade speed	4500 rpm
Max. cut 90°	75 mm
Max. cut 45°	55 mm
Bevel capacity	0 – 45°
Distance-to-wall cut	16 mm
Dust collection Ø inner / outer	35 / 38 mm
Motor	230 – 240 V~
Input	1600 W

**EXAMPLES OF USE**

Wooden boards




Planks

Laminate /
panelling**PRODUCT DETAILS**

Cutting depth 90°



Cutting depth 45°



Kompact design




Lightweight

Saw blade
210 mm x 30 mm x 2,4 mm

Idle speed 4500 rpm

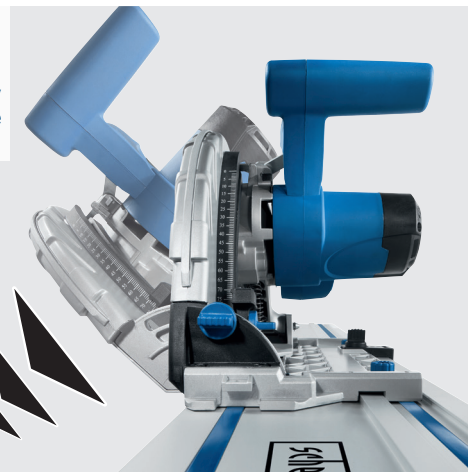


PL75

Conventional
hand-held circular saws

The advantage compared with conventional hand-held circular saws is the plunge function. Using this function, specific demands that require plunging the saw blade into the material can be implemented without problems.

Thanks to stepless adjustment, cuts from 0° to 45° are possible. Tilt protection securely keeps the PL75 on the rail at any angle.

45°

The integrated splinter guard ensures edges without splintering.



With its cutting depth of 75 mm, the PL75 ensures the same precise result as many circular table saws.



This plunge saw is ideal for cut-outs in kitchen work tops and allows precise work without splintering.



Shadow gaps up to 16 mm can be created quickly and safely using the PL75, even in veneered wood, thanks to the splinter guard.