



Slim Panel EcoMax G4

- Suitable for recessed and suspended applications
- Recessed ceiling frame and surface module kit available as accessory



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	UGR	CCT (K)	Beam angle	Weight (kg/pc)
On-Off									
542003099900	LEDPanelS-E4 Sq620-32W-830	TL 4x18W	32	4000	125	≤22	3000	115°	1.73

Accessories

					
542003021800 LEDPanelRc-S-B2 Mounting-Springs	542003021700 LEDPanelRc-S-B2 Suspension-Kit	542098000800 LEDPanelRC-SI U19 EM-kit 1h	542098000900 LEDPanelRC-SI U19 EM-kit 3h	542098030700 Junction-Box-WH	140060852 LEDFixture-Ceiling-Cable- Kit-0.5m

Packaging Information

Item			Box				
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box	
542003099900	LEDPanelS-E4 Sq620-32W-830	94051190	673x40x630	2.36	6941497771582	1	
140060852	LEDFixture-Ceiling-Cable-Kit-0.5m	73121020	100x100x5	0.40	6956321895266	1	
542003021700	LEDPanelRc-S-B2 Suspension-Kit	73121049	315x315x25	0.13	6941408821665	1	
542003021800	LEDPanelRc-S-B2 Mounting-Springs	73209090	280x200x170	0.10	6941408821672	1	
542098000800	LEDPanelRC-SI U19 EM-kit 1h	85044083	490x390x150	0.98	6941497702340	1	
542098000900	LEDPanelRC-SI U19 EM-kit 3h	85044083	490x390x150	1.08	6941497702333	1	
542098009700	LEDPanelRc Sq625-Frame-WH	94059900	715x88x721	1.84	6941497704054	1	
542098017500	LEDPanelRc2 Sq625-Surface-Kit-WH	94059900	812x77x68	1.59	6941497720689	1	
542098030700	Junction-Box-WH	85369010	43x103.4x26	0.06	6941408868684	1	

5 YEARS WARRANTY



Technical Specifications

Lifetime (L70)	60,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmability	On-Off
Finishing	White RAL9003
Colour rendering index (CRI)	> 80
Degree of protection (IP)	IP20
Impact strength	IK03
Protection class	II
Risk group (EN 62471)	RG0
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications
230V Cable length	1 m

Mechanical Properties


Housing material	Aluminum
Optical material	Polystyrene (PS)
Cover material	Polystyrene (PS)

Ambient Conditions


Operating temperature	-10-+45°C
Application temperature	+25°C
Storage environment	-25-+50°C

Dimensional Drawing (mm)


LEDPanelS-E4 Sq620-32W

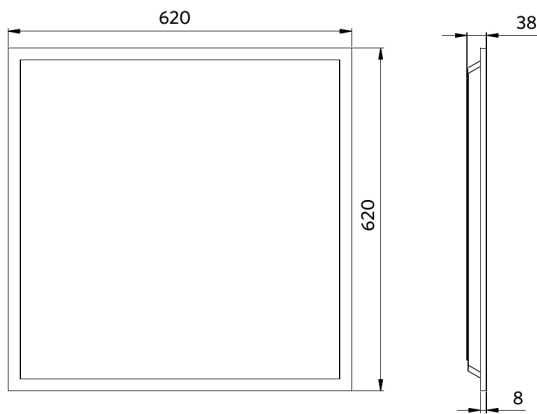

LEDPanelS-E4 Driver On/Off



LEDPanelS-E4 Driver DALI

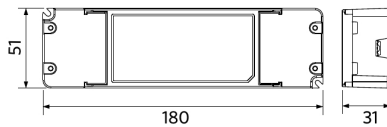

Photometric Data

