



**Trunking**

- Professional LED light line solution
- Simple installation with snap-in mounting of LED modules and trunks
- Integration of 3C Spots possible with 3C Track Module accessory



## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	Beam angle	Net Weight (kg/pc)
<b>On-Off</b>							
542005005800	LEDTrunking Module L15-50W-4000-120	TL 2x80W	50	9000	180	120°	1.64

DALI versions are compatible with central emergency lighting according to EN 50172. For more technical information, please go to the appendix.

## Accessories



542098001300  
LEDTrunking Feed-in Box 8



542098001700  
LEDTrunking End Cap



542098001800  
LEDTrunking Cover L15



542098001900  
LEDTrunking Mounting Clip Chain



542098002000  
LEDTrunking Cord-3m



542098002900  
LEDTrunking Mounting Clip



542098011000  
LEDTrunking Cover End Cap



542098011200  
LEDTrunking Feed-out Box 8



542098012700  
LEDTrunking 3C Track Module

# Packaging information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg/pc)	EAN	pc/box
542005005800	LEDTrunking Module L15-50W-4000-120	94054239	1500x79x77	1.75	6956712695710	1
542098001300	LEDTrunking Feed-in Box 8	85369010	274x93x68	0.64	6945730496584	1
542098001500	LEDTrunking Feed-in Connector 8	85369010	81x96x25	0.05	6945730496560	1
542098001700	LEDTrunking End Cap	94059200	79x73x20	0.02	6945730496546	1
542098001800	LEDTrunking Cover L15	94059200	1500x71x22	0.27	6945730496539	1
542098001900	LEDTrunking Mounting Clip Chain	73121020	59x36x105	0.10	6945730496522	1
542098002000	LEDTrunking Cord-3m	73121020	101x36x72	0.11	6945730496515	1
542098002100	LEDTrunking Trunk 8 L15	94059900	1651x71x49	1.96	6945730496508	1
542098002200	LEDTrunking Trunk 8 L15 End Part	94059900	1501x71x49	1.62	6945730496492	1
542098002300	LEDTrunking Trunk 8 L30	94059900	3151x71x3808	3.63	6945730496485	1
542098002400	LEDTrunking Trunk 8 L30 End Part	94059900	3001x71x49	3.28	6945730496478	1
542098002900	LEDTrunking Mounting Clip	73209090	59x36x50	0.02	6945730496423	1
542098003000	LEDTrunking Cable Gland	39174000	47x47x50	0.02	6945730496416	1
542098011000	LEDTrunking Cover End Cap	94059200	71x16x100	0.02	6941408815442	1
542098011200	LEDTrunking Feed-out Box 8	85369010	306x80x68	0.57	6941408815466	1
542098012700	LEDTrunking 3C Track Module	94059900	1499x70x47	1.83	6941408834375	1

## Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	60,000 h
Lifetime (L90)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
CCT (K)	4000 K
RAL-Number	9016
Colour rendering index (CRI)	> 80
Ingress Protection (IP)	IP20
Protection class	I
Risk group (EN 62471)	RGO
With control gear	True
Power factor	≥ 0.9

## Electrical Supply


Frequency	50 - 60 Hz
Nominal voltage	220 - 240 V
DC input voltage	See catalogue appendix Connection Specifications

## Mechanical Properties


Housing material	Steel
Optical material	PMMA

## Ambient Conditions


Operating temperature	-25 - 40 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C




# Dimensional Drawing (mm)



Type	A	B	C	D
L1500	1500	100	70	39
L3000	3000	100	70	39

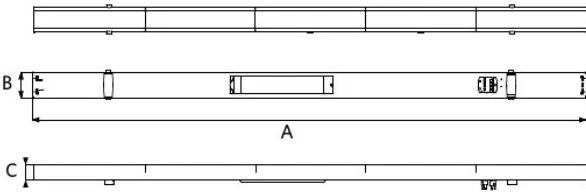

Type	A	B	C
Mod	1499	70	39



Type	A	B	C	D
L1500	1500	150	70	39
L3000	3000	150	70	39

# Photometric Data

